


Subconn PUR Cable Type P3TP24#OSWB

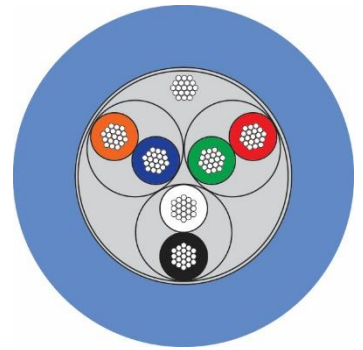

Construction characteristics

3 x Twisted pairs	24 AWG Tinned Copper, PTFE insulated Colour: BK/WH, RD/GN, OR/BU
Layup and overall screen	The twisted pairs are cabled together with waterblocking compound in interstices Alum-mylar shield face in with a 24AWG copper drain wire
Jacket	Polyurethane, 95 Shore A 1.3 mm nom RTI OD: 6.35 mm Colour: BU

Mechanical characteristics

Depth rating	7,000 m
Recommended bend radius	63.5 mm
Nominal weight	
In air	71 kg/km
In seawater	40 kg/km

Electrical characteristics

Conductors	
Conductor resistance (Approx.)	82.0 Ω /km
Voltage rating	600 V