


## Subconn PUR Cable

## Type P6C16#

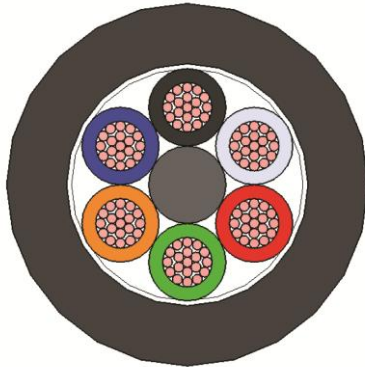

Document no.	2013008SC
Revision	A
Date	15.04.2014
Prepared by	LLS
Approved by	KL

### Construction Characteristics

<b>Conductors</b>	0,52 mm <sup>2</sup> (#20AWG) tinned copper wires, insulated with Polypropylene (6 off)
<b>Filler</b>	Filler for roundness
<b>Binder</b>	An overall clear polyester tape
<b>Outer jacket</b>	Polyurethane jacket. Color black. Nominal thickness approx. 1,27 mm

### Mechanical Characteristics

<b>Diameter</b>	Nom. 9,28 mm
-----------------	--------------