


Subconn PUR cable

Type: P8C16#

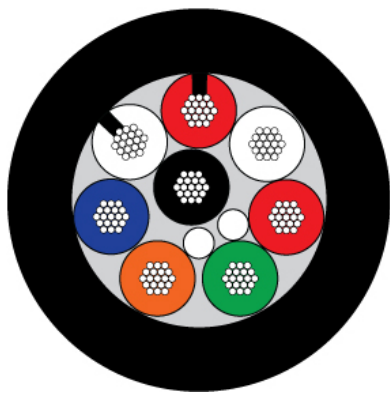

Document no. 2015042SC
Revision B
Date 12.01.2018
Prepared by LMR
Approved by KL

Construction Characteristics

Conductor	1,34 mm ² (16 AWG) stranded copper conductors cabled together and insulated with polypropylene (8 ea)
Binder	An overall clear mylar
Outer jacket	Polyurethane jacket, black, nominal wall thickness approx. 2,2 mm

Mechanical Characteristics

Outer OD	11,99 ± 0,25 mm
-----------------	-----------------

Electrical and Physical Characteristics

Voltage rating	600 V
-----------------------	-------