

SubConn® Micro Circular Double O-ring

10, 12 and 16 contacts

Connector specifications

Voltage rating	300 V DC/AC rms
Current rating	5 A per contact (max 30 A per connector)
Insulation resistance	> 200 Mohm
Contact resistance	< 0.01 ohm
Wet matings	> 500 (open face rated)
Temperature rating (water)	- 4 to 60°C, 25 to 140°F
Temperature rating (air)	- 40 to 60°C, - 40 to 140°F
Storage temperature rating	- 40 to 60°C, - 40 to 140°F
Qualified pressure tested	800 bar, 11,600 psi

Material specifications

Connector body	Chloroprene rubber
Bulkhead body	Brass, titanium, anodised aluminium or stainless steel
Contacts	Female sockets in gold plated brass UNS - C36000
	Male pins in gold plated beryllium copper
O-rings	Nitrile
Locking sleeves	POM or stainless steel
Snap rings	Stainless steel AISI 302
Bulkhead leads (1 ft, 30 cm)	20 AWG, 0.52 mm ² coloured PTFE


Face view (male)






For more information
see page 30/31


MCIL10F
MCOM10F
MCPBOF10F
MCDC10F

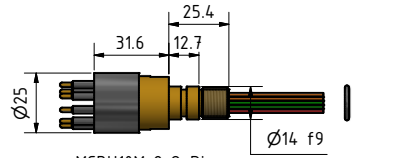

MCBH10M 2 O-Ring
Key Flats 22mm

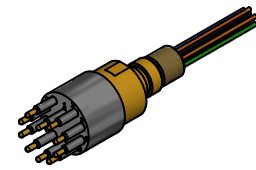


O-Ring
Ø10.82 x 1.78
(2-013)




For more information
see page 30/31


MCIL10M
MCOM10M
MCPBOF10M
MCDC10M




MCBH10F 2 O-Ring
Key Flats 22mm



O-Ring
Ø15.6 x 1.78
(2-016)



DLSA-F



DLSA-M



Drawing information

Dimensions in mm (1 mm = 0.03937 inch)
Threads in inches (1 inch = 25.4 mm)

